


# AQUAFLO®

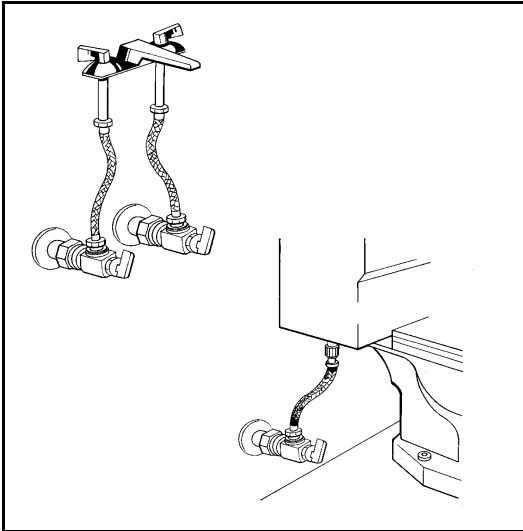

## MIGHTYFLEX POLISHED BRASS CONNECTORS Specification Sheet

### FAUCET CONNECTORS

PART NUMBER	DESCRIPTION	LENGTH
SFB-112-1	1/2" Soft Cone	12"
SFB-120-1	x 3/8" Compression	20"
SFB-130-1	x 5/16" ID	30"

### TOILET CONNECTORS

SWB-112-1	7/8" Soft Ballcock	12"
SWB-120-1	x 3/8" Compression x 5/16" ID	20"

### DESIGN FEATURES

- Chloramine resistant soft cones
- Exclusive POWR-TIGHT 12-point crimp-many times industry standard
- Chloramine resistant tubing
- Withstands dramatic changes in water pressure
- Easy installation, no special tools or soldering required.

### MATERIAL SPECIFICATIONS

- Working Pressure: 160 psi
- Operating Temperature: 33° F - 140° F
- Tubing: Reinforced PVC, NSF 61 Compliant
- Nuts & End Fittings: Brass-Plated Brass
- Washers: NSF 61 Compliant

### COMPLIANCES/LISTINGS

- IAPMO Certified
- NSF Compliant
- ASME A112.18.6



3689 Arrowhead Drive, Carson City, NV 89706

Phone (800) 854-3215 Fax (800) 243-1777

E-mail sales@lspproducts.com Website www.lspproducts.com

Content matter is subject to change at any time. It is the user's responsibility to ensure the most updated revisions are obtained.

AF/S-2011 (04-08) Rev 3

Product Submittal	
Job Name	
Date	
Part Number	Quantity
Architect	
Contractor	